




INNOVATION AND VERSATILITY FOR ALL INDUSTRIES



**TECNOBOX**  
Engineering that optimizes processes

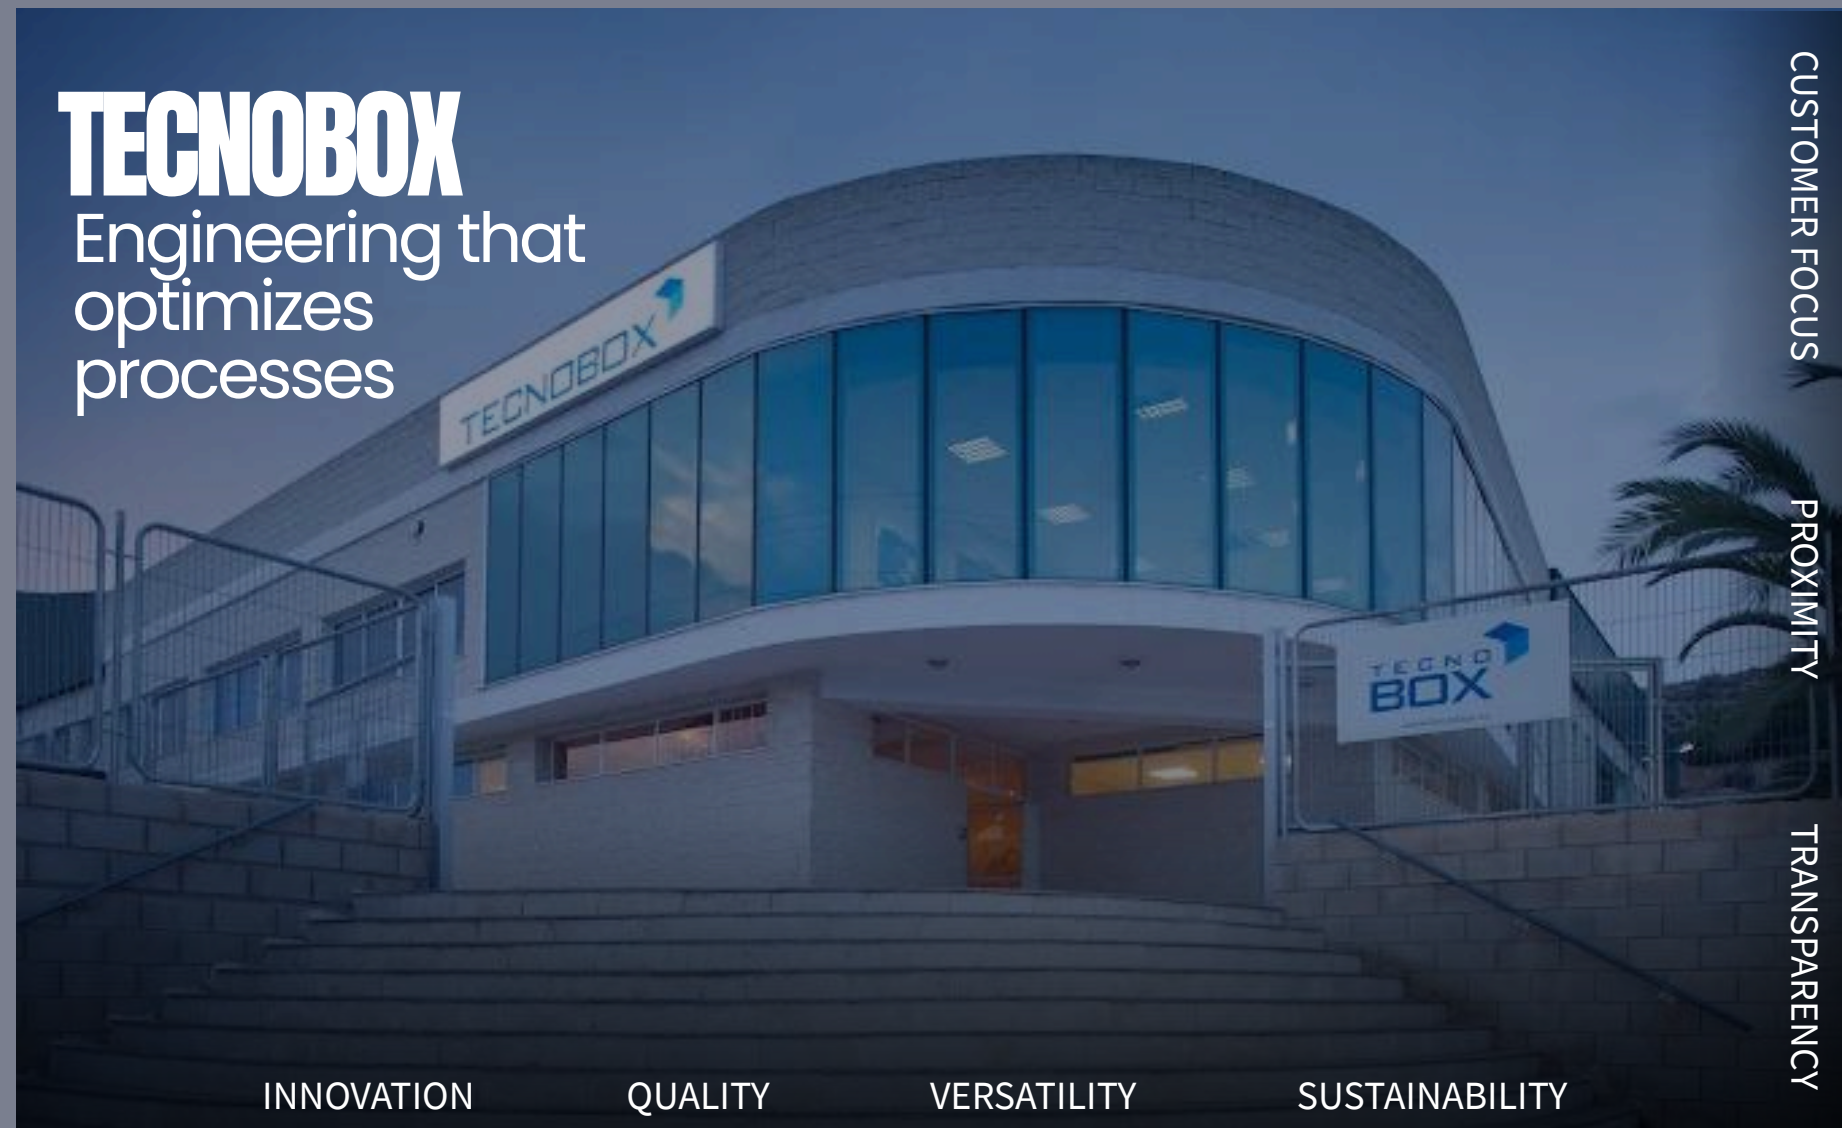

CUSTOMER FOCUS  
PROXIMITY  
TRANSPARENCY

INNOVATION      QUALITY      VERSATILITY      SUSTAINABILITY

Our machines achieve production capacities of over 3,000 cycles per hour, maintaining maximum versatility, stability, and precision—even in intensive work environments with frequent format changes.

# TB2-PACK

CONTAINER ASSEMBLING MACHINE

**+ 25**  
Countries using our machines

**+ 180**  
Annual machine production

**+ 26**  
Years providing packaging solutions

Our international footprint,  
**at the service of your industry**



AGRICULTURAL - PHARMACEUTICAL - FISH PROCESSING - FLORAL - BAKERY - TAKE AWAY - POULTRY - MEAT - E-COMMERCE



# TB2- PACK CONTAINER ASSEMBLING MACHINE

## DIMENSIONS

Length: 3.625mm / Width: 2.105mm / Height: 2.460mm

### Weight

1.650Kg.

### Consumption & Specifications

Supply Voltage: 400V+3+N+PE

### Power Consumption

5.5Kw.

### Working Pneumatic Pressure

7 Bar

### Pneumatic Consumption at Maximum Speed

900L/Min

### Approx. Loader Capacity

150 Sheets per Line

### Adhesive Systems

Meler Micrón 10kg/20kg/Melton NC16

### Adhesive Hose Layout

Direct Outlet / Distributor

# TB2-PACK

TECHNICAL SPECIFICATIONS

## INCLUDES

- Independent programming of glue injectors
- Speed variator on male telescope
- Automatic zero-point search
- Transport wheels
- Positioning silentblocks
- 4 mm thick chassis
- Automatic water purge
- 50 L Tank
- External Air Connection
- Sheet Sensor in Loader
- Touch Screen
- Languages: SPANISH/ENGLISH

INCLUDES

## NEWS

### ADJUSTABLE LOADER Tool-Free



### ELECTRICAL CABINET Larger Size



### SUCTION CUP ADJUSTMENT By means of a counter



NEWS

We adapt technology, optimize processes, and develop customised solutions


## FEATURES

TB2-PACK stands out for its high versatility, being capable of handling most formats available on the market through simple accessory changes. Its operation is simple and intuitive thanks to an easy-to-program touch screen, which facilitates daily setup and use. It features a new loader and suction cup adjustment system that requires no tools, significantly reducing changeover times and improving operability. It offers operation up to 2,400 cycles per hour, with the possibility of increasing production to 3,000 cycles per hour through an optional kit. In addition, it fully complies with safety regulations and RD 12/2015, and has been designed for minimal maintenance, using standardised consumables that are readily available on the market.

FEATURES

## SHEET AND BOX DIMENSIONS


### SHEET AND BOX DIMENSIONS

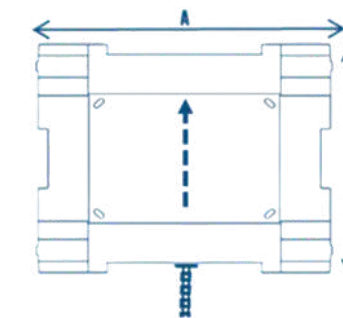

SHEET DIMENSIONS

Max. A: 1.357mm.

Max. B: 1.072 mm.

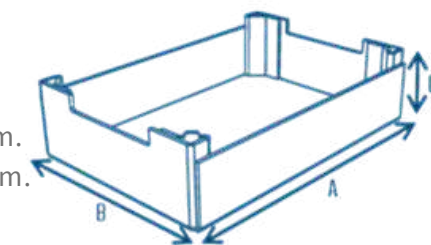

BOX DIMENSIONS

Max. A: 800mm. Min. A: 280mm.

Max. B: 600mm. Min. B: 180mm.

Max C: 280mm. Min. C: 60mm.

SHEET AND BOX DIMENSIONS

## BOX MODELS



## BOX MODELS

BOX MODELS

## CONFIGURE YOUR MACHINE

### CONFIGURE YOUR MACHINE - Speed Upgrade Kit

Allows increasing the machine's operating speed from 2,400 cycles/hour to 3,000 cycles/hour.

### Adhesive Tank



### Vacuum System



### Hose Layout



CONFIGURE YOUR MACHINE